



Werktuigen



MT 625 T

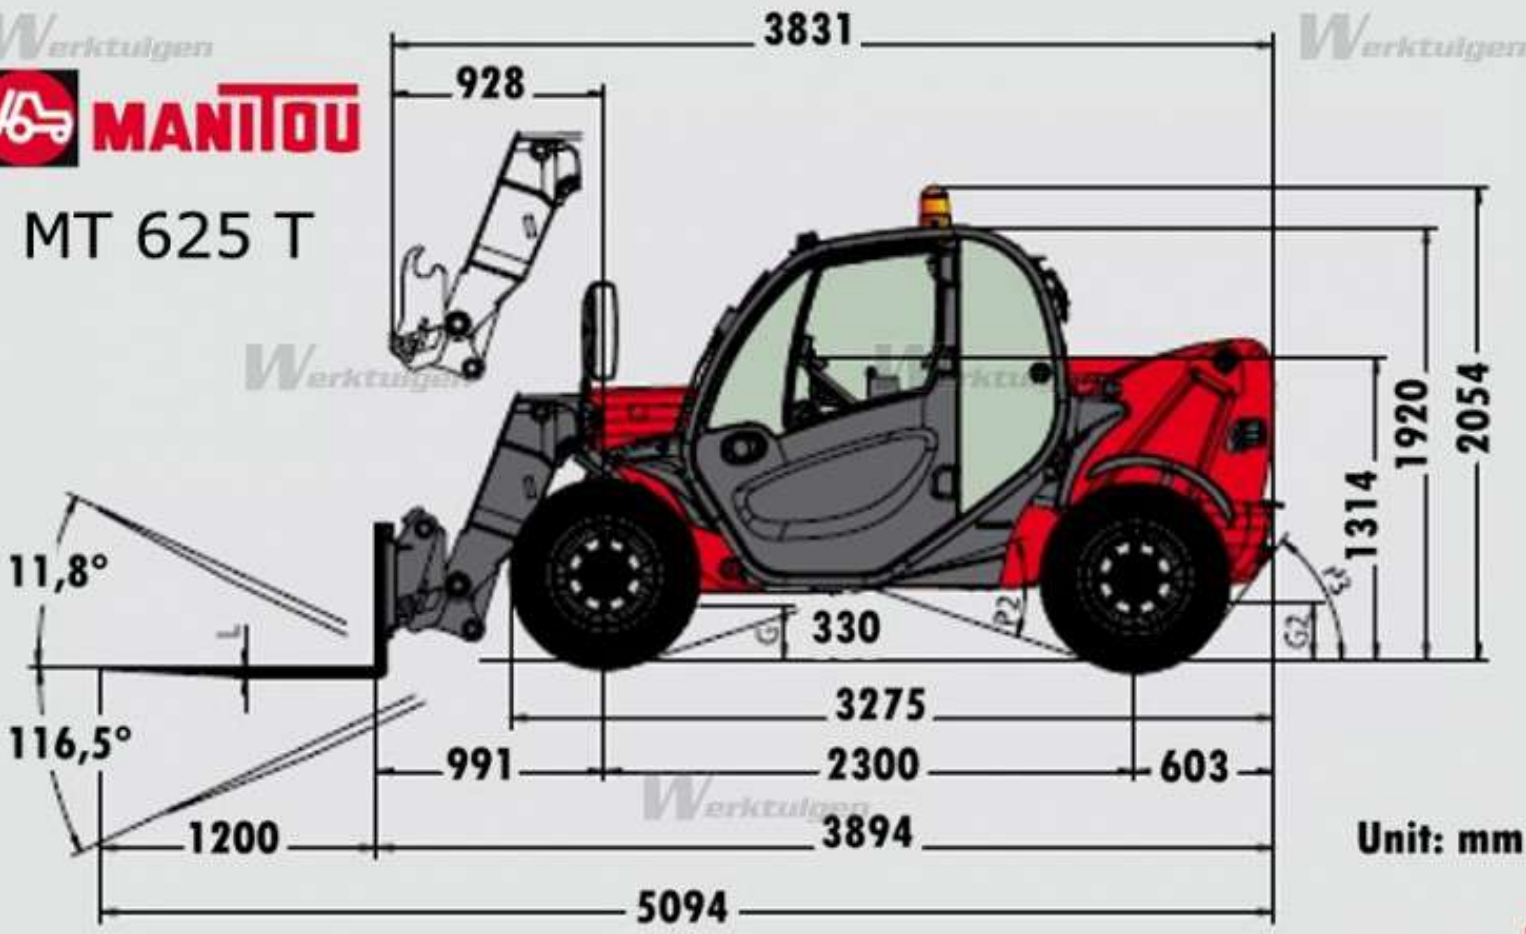


Unit: mm

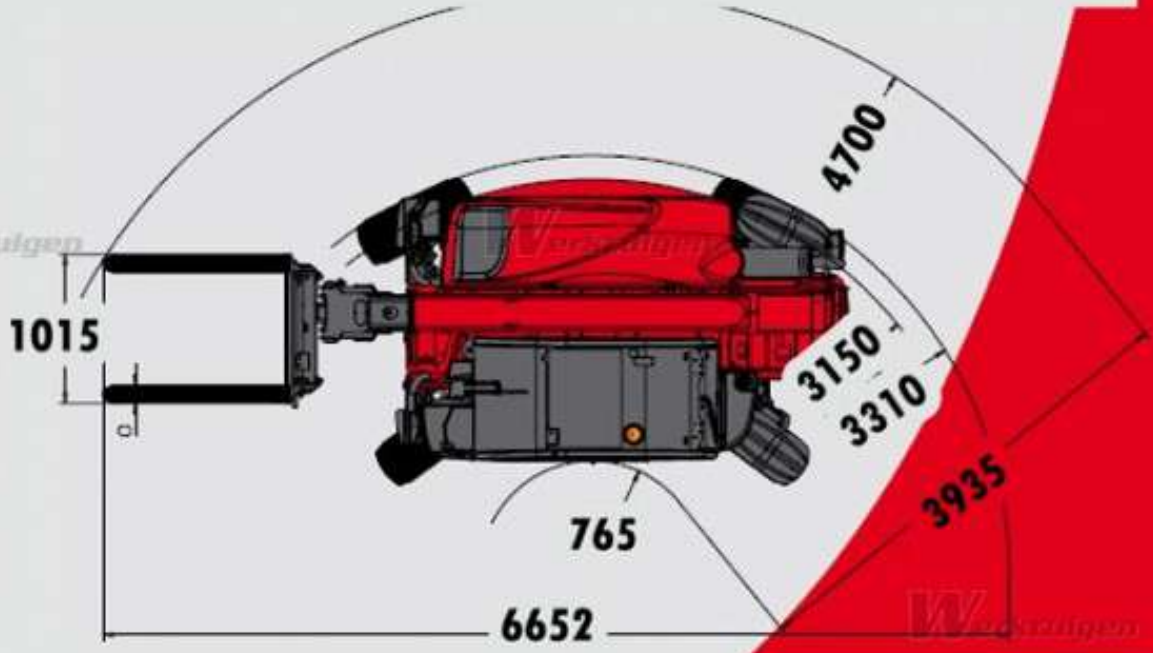

Under 2 m in height

Good ground clearance

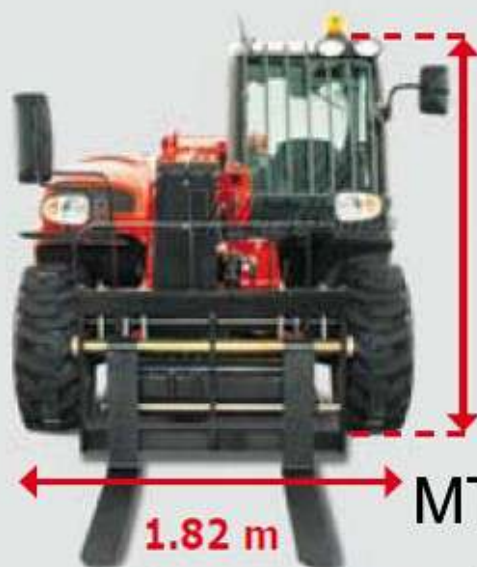

MANTOU

1.92 m

1.82 m

MT 625 T



0.33 m

3.90 m



2000
kg

5.85 m




3.30 m




Weight: 4.710 Kg



MANITOU

MT 625 T

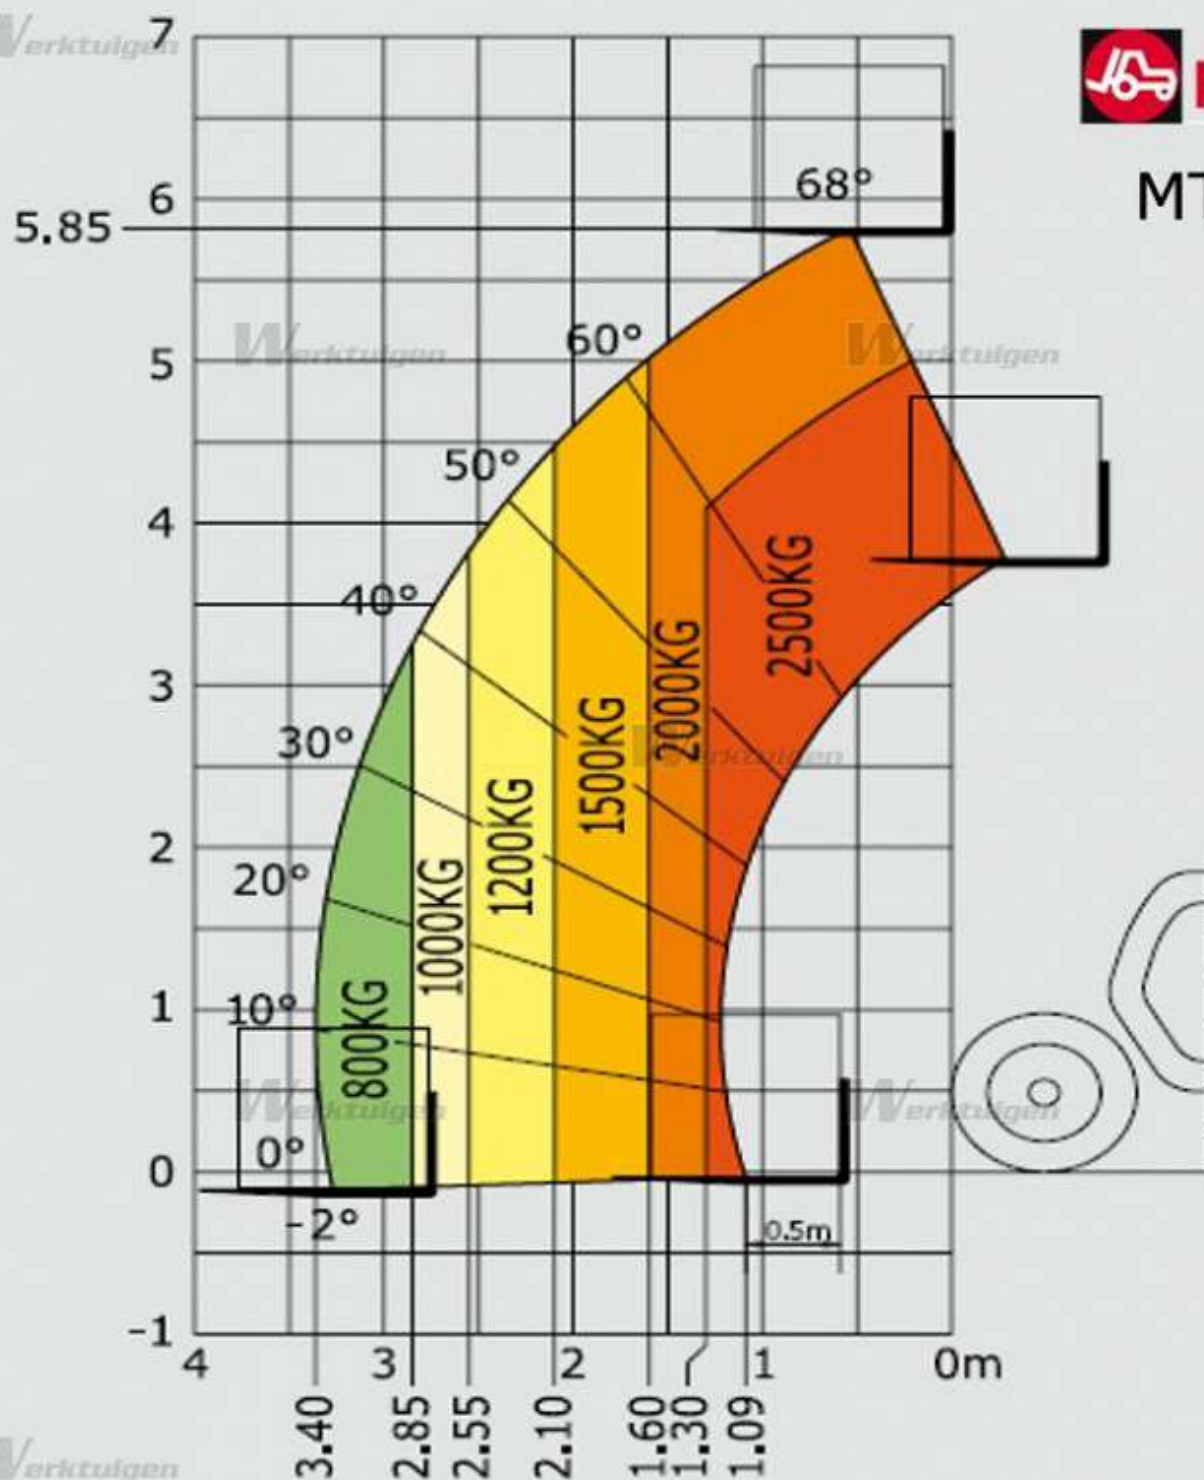

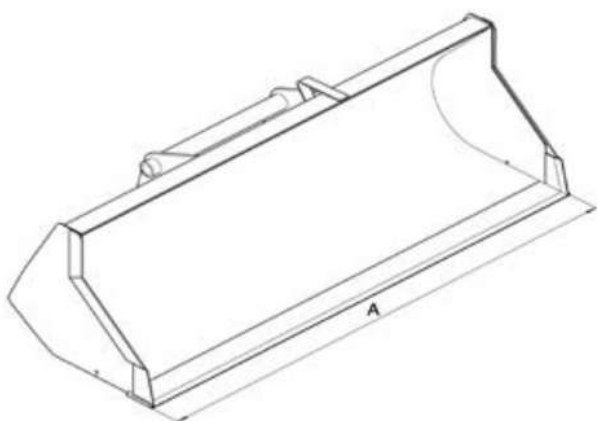

	Capacity (L)	A	B	C	E	G	Weight (kg)
CBR 730L/1850	735	1850	775	957	815	857	330

IT

Descrizione:

Braccetto lungo 4mt con una portata di 600Kg.

EN

Description:





4m long arm with carrying capacity of 600 kg.



DE

Beschreibung:

Verlängerung mit 4 m Länge und Tragkraft von 600 kg.



[kg] (lb)	[t] (t)	[mm] (in)								[kg] (lb)
										
600 (1322)	5 (5)	A	B	C	D	E	F	G	H	395 (870)
		1810 (71)	900 (35)	506 (20)	730 (29)	353 (14)	270 (11)	750 (29)	750 (29)	

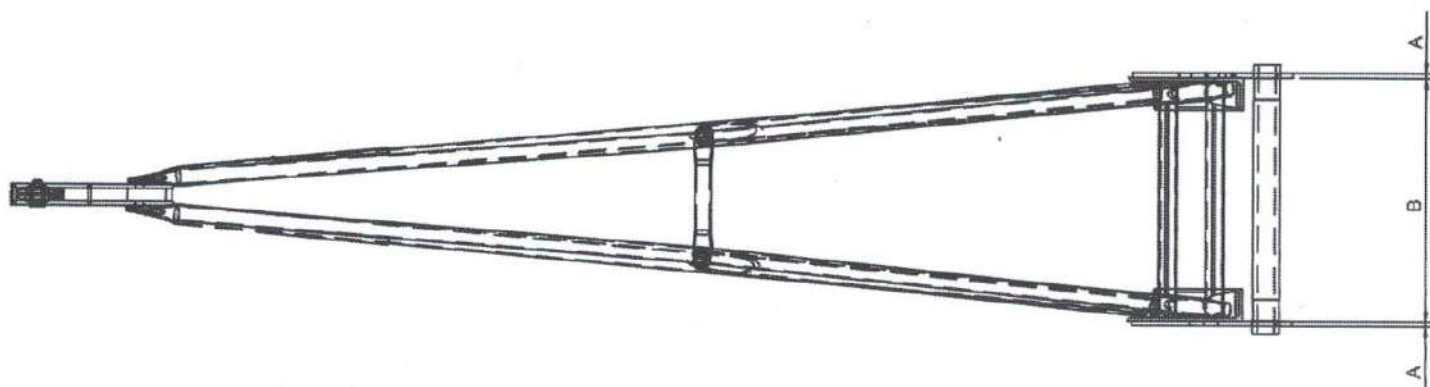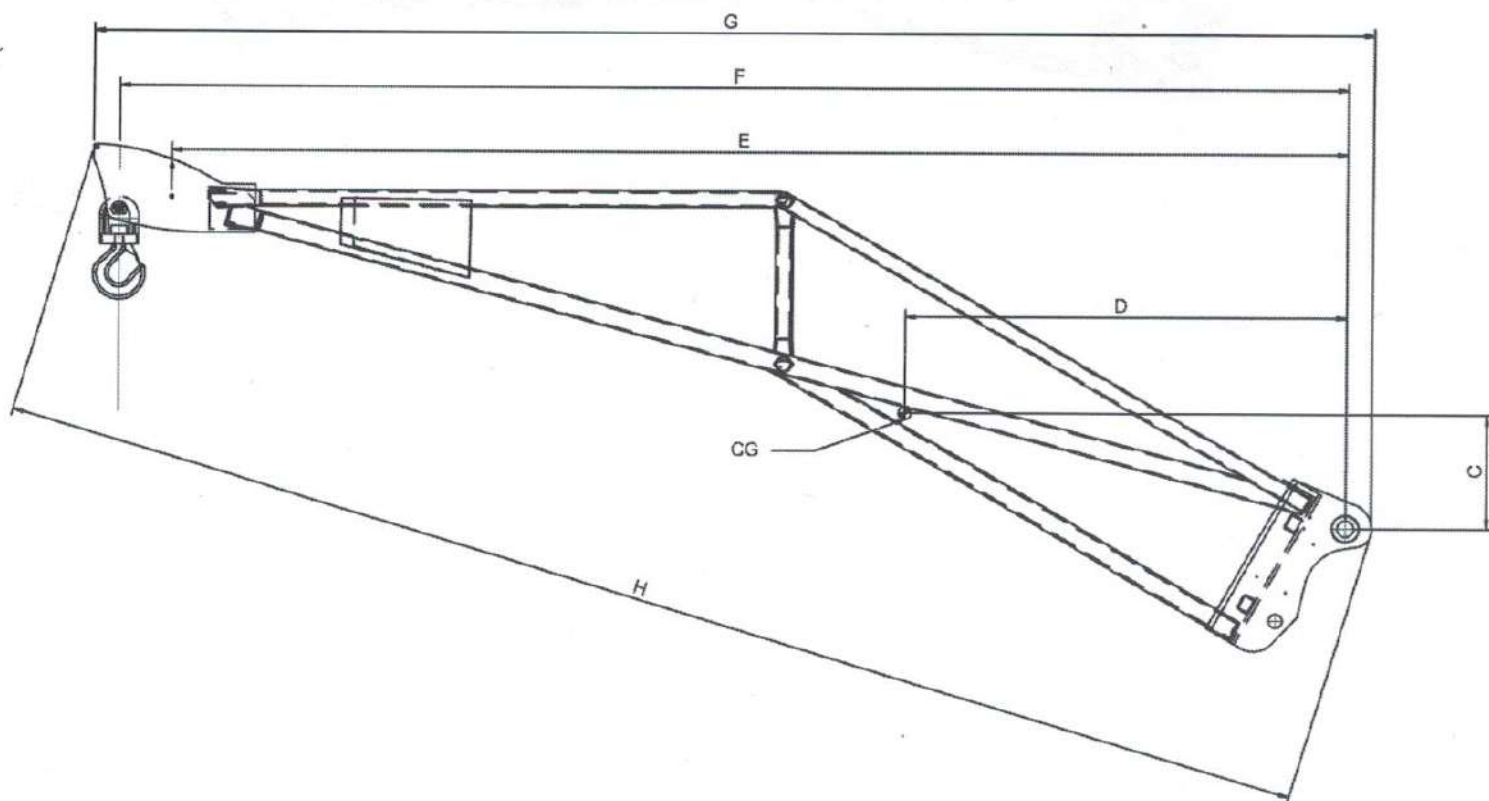

IT

Descrizione:

Braccetto lungo 0,50 m con una portata di 5000Kg.

EN


Description:





0.50 m long arm with a capacity of 5000 kg.

DE

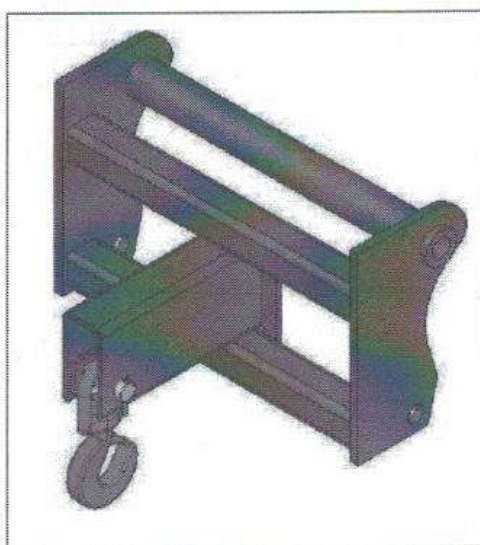Beschreibung:

Verlängerung mit 0,50 m Länge und Tragkraft von 5000 kg.



[kg] (lb)	[t] (t)	[mm] (in)									[kg] (lb)
											
5000 (11023)	5 (5)	A	B	C	D	E	F	G	H	I	120 (265)
		740 (29)	598 (23)	470 (18)	354 (14)	153 (6)	156 (6,1)	200 (7,8)	462 (18)	484 (19)	

